

schülein electronic

Heppstädt 31



D-91325 Adelsdorf

Tel.: 09195 - 99 33 86

Fax: 09195 - 99 33 41

eMail: info@schuelein.com

www.schuelein.com

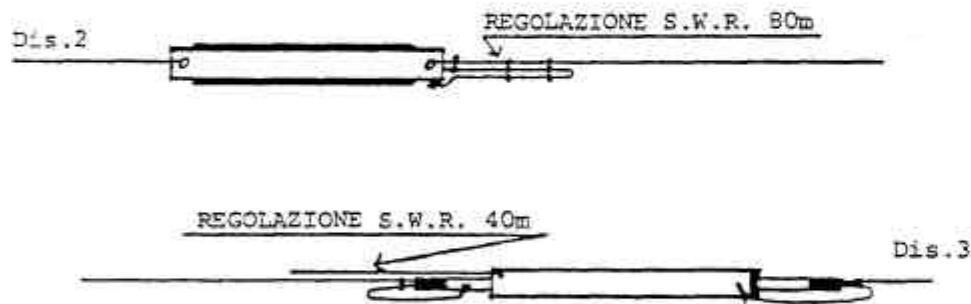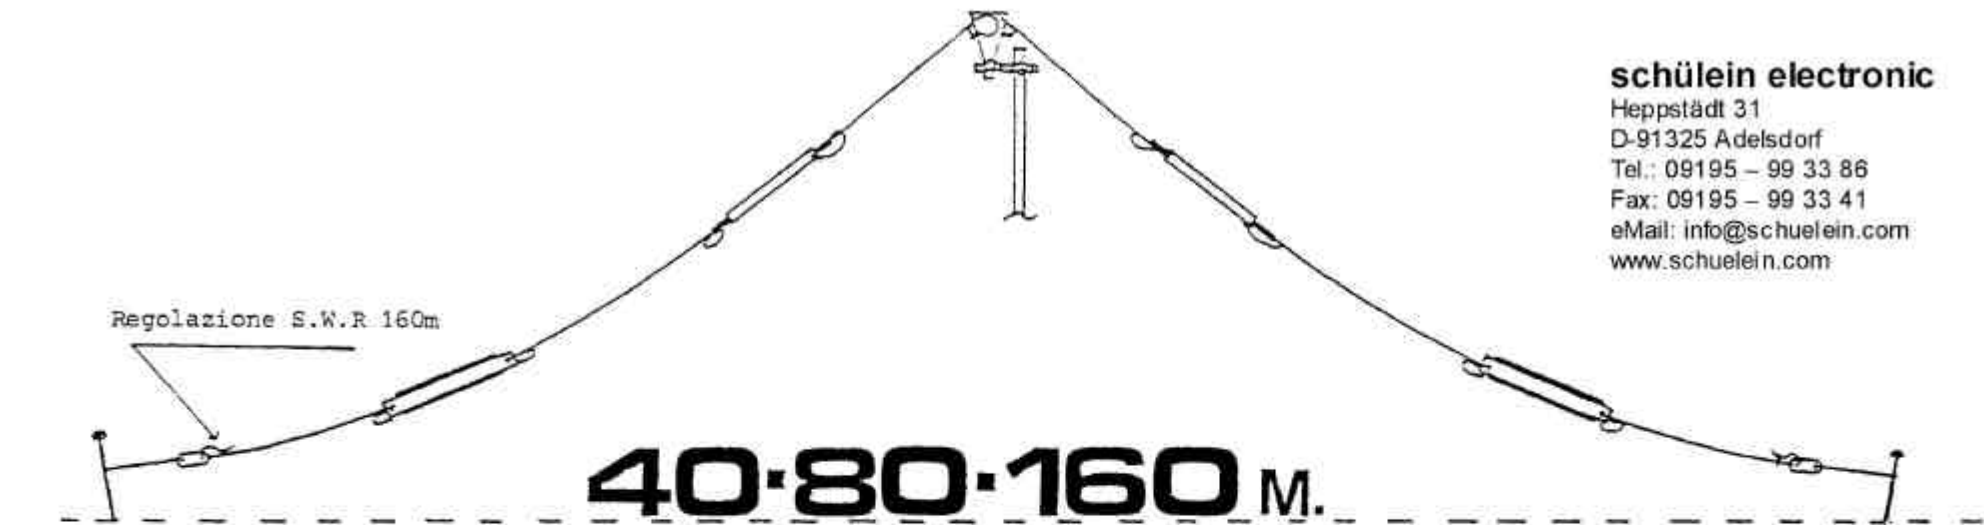

ECO Sperrkreis Draht-Dipol 40/80/160m (Art.68)

Technische Daten / Technical Datas

Impedanz / nominal impedance

Länge / length

max.HF-Sendeleistung / max.Rf-Output

Koax-Anschluß / Coax Connection

Neigungswinkel / branch inclination

SWR

Masthalterung / pole connection

Kalibrierung / regualtion

Gewicht / weight

Mindestabstand / minimum distance

52 Ohm

32,50 m

1 kW CW / 2 kW SSB 40-80m

500 W CW / 1kW SSB 160m

SO 239

35 °

siehe Diagramm

Metallbügel / metal bracket

auf 3 Bändern / on 3 bands

3600g

200 cm

GRAFICI DEL'S.W.R. RIFERITI AGLI STUB
DI REGOLAZIONE DELLE GAMME.

