


2 El. Richtantenne HB9 extended 10m + 40m (11m + 45m)

2 el. Directive HB9 extended 10m + 40m (11m + 45m)

2 el. Direttiva HB9 extended 10m + 40m (11 m + 45m)

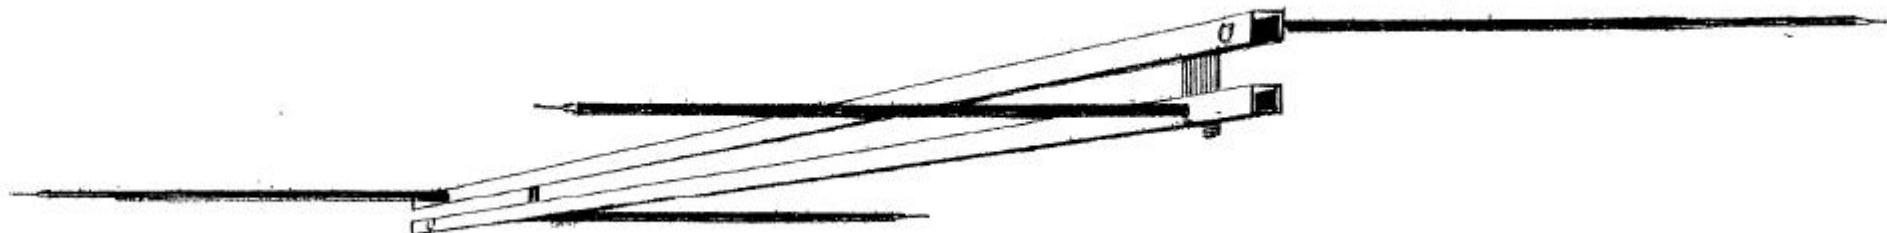

Technische Daten / Specifications / Caratteristiche

Frequenz frequency frequenza	:	28 (27) MHz + 7 (6.6) MHz
Impedanz impedance impedenza	:	52 Ohm
S.W.R. S.W.R. R.O.S.	:	10m 1:1,2 40m 1:1,2 [11m 1:1,2 45m 1:1,0]
Gewinn gain guadagno	:	6 dBi
Boomlänge boom length lunghezza boom	:	87 cm
Längstes Element longest element elemento piu lungo	:	150cm
Drehradius turning radius	:	160 cm
Anschluß connector connettore	:	SO 239
Gewicht weight peso	:	1,5 kg
Leistung power potenza	:	450 W SSB
Material material materiale	:	Aluminium (anticorodal)
Elemente elements elementi	:	Fiberglas Wendelstrahler helicoidal by fibreglass elicoidali in fibra